

DUAL - TECH, INC.

1240 series



• Exclusive Quad Rail Tracking System



*Built for
long
lasting
service!*

(Just ask our customers)

The exclusive patented 64' quad rail subframe is the strongest in the industry.




**Our carriers slide on 1,152 square inches of wear pads.
No other unit can match the slide area on a Dual-Tech.**




The hinge pin is made of sascoloy ultra high strength steel. (170,000 psi)
The quad rail system allows the use of dual hinge plates per side. All bolts are grade 8.



All hoses are double braided steel. All carriers are equipped with hydraulic counter balance valves that lock the system into place when the PTO is not engaged.

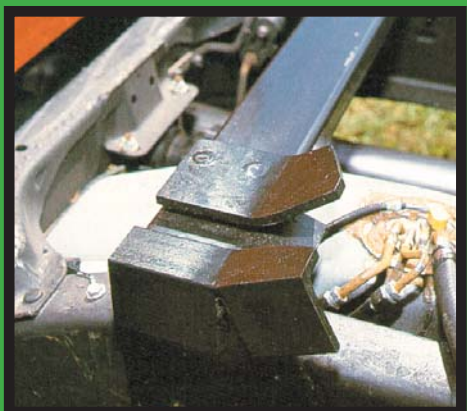

Patented dual flange bed locks capture the lower flanges of the I-beam with only 1/16" clearance. This safety feature provides a positive lock down and virtually eliminates all bed noise.

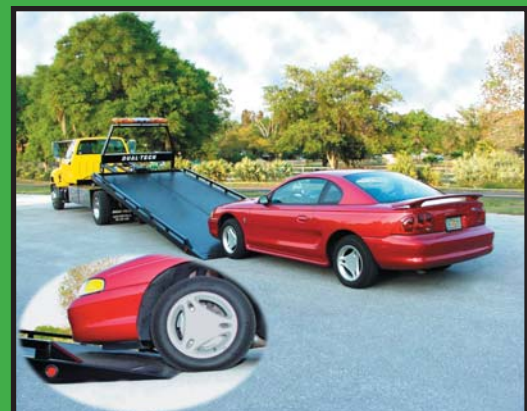

Our exclusively engineered subframe enables us to achieve up to a 27 degree dump angle and as low as a 10 degree load angle.



Dual-Tech's combination tow bar - wheel lift converts in less than a minute. The wheel lift adjusts to accommodate a variety of vehicles from compact cars to full size pick up trucks. The vehicle to be towed may be driven over the swivel pad receiver. It also has a built-in stabilizer. Wheel lift rating is 4,000lbs. fully extended and 4,500lbs. retracted. Towing capacity 7500 lbs.

Wheel lift reach is 84" to back of tire

Tow bar reach is 60"

Tow bar height is 44"



Dual-Tech takes pride in the quality of their workmanship by offering an outstanding warranty on the strongest, state-of-the-art subframe in the industry.



WARRANTY

- 1 year warranty on unit
- 2 year warranty on subframe against failure
- *See manufacturers warranty for full details.



Also Available

- Extended 3 year, 4 year, or 5 year

Dual - Tech 1240 Description:

12,000lb. deck capacity
4,000lb. wheellift capacity
7,500lb. tow capacity
3/16" deck
Outside bed width 96"
Inside bed width 92"
8" crossmember spacing

Requirements:

19'6"
CA 119" - 125"
GVW 17,500 - 25,900

21'
CA 136" - 144"
GVW 19,500 - 25,900

22' -23'
CA 150" - 168"
GVW 22,000 - 26,000



Standard Equipment

Black bed	Black subframe
Wide flange I-beam	Dual hose trays
Removable Rails	Quad rail subframe
Full-length wear pads	Bed mounted pylon
Dual flange bed locks	Double braided hose
10K Planetary winch	Cable guide
Cable tensioner	3/8" x 50' cable
Ind. Towbar/Wheellift	Chain V-bridle
Counter balance valve	Marker lights
Lower work lights	2 - wheellift straps & ratchets
2 - pr safety chains	Pre-wire for lightbar
Dual-Tech mudflaps	Towlight plug
Safety pin for wheellift	Hydraulic oil filter
Hydraulic oil tank	Pump
3/16" deck sheet	DOT strip
Chain T-Slots	8" crossmember spacing
101" Wide Deck	

Optional Equipment

Custom bed colors	Light Bar
Stationary pylon	60" basket
12K planetary winch	Pylon work lights
7/16" x 85' cable	LED lighting
Toolboxes 36" - 60"	Safety kit
High tensile deck sheet	6" crossmember spacing
Switch Panel	Jumpstart kit
Additional marker lights	Enclosed pylon
Chain pockets	Wireless remote
Motorcycle carrier	Winch extension handle
Additional T-slots	Magnetic towlights
Open post rails	Safety Chain Pockets
PTO	

Dual-Tech reserves the right to make changes to product and equipment without notice.



540 Industrial Dr.
Bean Station, TN 37708
PH 865-767-3456 TOLL 800-852-0345
www.dual-techinc.com

Local Distributor