

# DUAL - TECH, INC.

## INVADER SERIES

- Exclusive Quad Rail Tracking System



*Built for  
long  
lasting  
service!*

(Just ask our customers)



The exclusive patented 64' quad rail subframe is the strongest in the

industry.



**Our carriers slide on 1,152 square inches of wear pads. No other unit can match the slide area on a Dual-Tech.**




The hinge pin is made of sascoloy ultra high strength steel. (170,000 psi) The quad rail system allows the use of dual hinge plates per side. All bolts are grade 8.



All hoses are double braided steel. All carriers are equipped with hydraulic counter balance valves that lock the system into place when the PTO is not engaged.

Our exclusively engineered subframe enables us to achieve up to a 27 degree dump angle and as low as a 10 degree load angle.

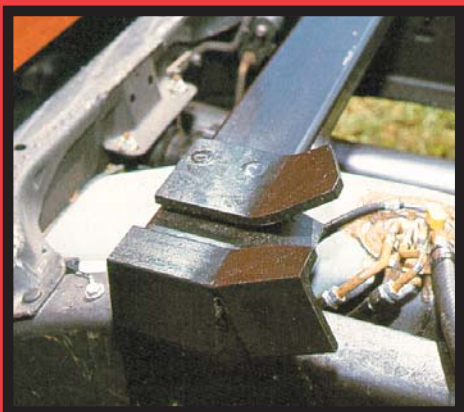

Patented dual flange bed locks capture the lower flanges of the I-beam with only 1/16" clearance. This safety feature provides a positive lock down and virtually eliminates all bed noise.

Dual-Tech's combination tow bar - wheel lift converts in less than a minute. The wheel lift adjusts to accommodate a variety of vehicles from compact cars to full size pick up trucks. The vehicle to be towed may be driven over the swivel pad receiver. It also has a built-in stabilizer. Wheel lift rating is 3,500lbs. fully extended and 4,000lbs. retracted. Towing capacity 6500 lbs.

Wheel lift reach is 84" to back of tire

Tow bar reach is 60"

Tow bar height is 44"



Dual-Tech takes pride in the quality of their workmanship by offering an outstanding warranty on the strongest, state-of-the-art subframe in the industry.



## WARRANTY

- 1 year warranty on unit
- 2 year warranty on subframe against failure
- \*See manufacturers warranty for full details.



## \*Also Available\*

- Extended 3 year, 4 year, or 5 year warranty against subframe failure.

# Dual - Tech Invader



## Dual - Tech Invader Description:

10,000lb. deck capacity  
3,500lb. wheellift capacity  
6,500lb. tow capacity  
3/16" deck  
Outside bed width 96"  
Inside bed width 92"  
10" crossmember spacing

## Requirements:

19'6"  
CA 119" - 125"  
GVW 17,500 - 25,900

21'  
CA 136" - 144"  
GVW 19,500 - 25,900

## Standard Equipment

Black bed	Black subframe
Wide flange I-beam	Dual hose trays
Solid Rails	Quad rail subframe
Full-length wear pads	Bed mounted pylon
Dual flange bed locks	Double braided hose
9K Planetary winch	Cable guide
Cable tensioner	3/8" x 50' cable
Ind. Towbar/Wheellift	Chain V-bridle
Counter balance valve	Marker lights
Lower work lights	2 - wheellift straps & ratchets
2 - pr safety chains	Pre-wire for lightbar
Dual-Tech mudflaps	Towlight plug
Safety pin for wheellift	Hydraulic oil filter
Hydraulic oil tank	Pump
3/16" deck sheet	DOT strip
Chain T-Slots	10" crossmember spacing

## Optional Equipment

Custom bed colors	Light Bar
Stationary pylon	60" basket
10K & 12K planetary winch	Pylon work lights
7/16" x 85' cable	LED lighting
Toolboxes 36" - 60"	Safety kit
High tensile deck sheet	Jumpstart kit
Switch Panel	Removable Rails
Additional marker lights	Enclosed pylon
Chain pockets	Wireless remote
Motorcycle carrier	Winch extension handle
Additional T-slots	Magnetic towlights
Open post rails	Safety Chain Pockets
PTO	101" Wide Deck

Dual-Tech reserves the right to make changes to product and equipment without notice.

## Local Distributor



540 Industrial Dr.  
Bean Station, TN 37708  
PH 865-767-3456 TOLL 800-852-0345  
www.dual-techinc.com